




DRYING

STACK DRYERS ECONOMIC LINE SC-2-22 M

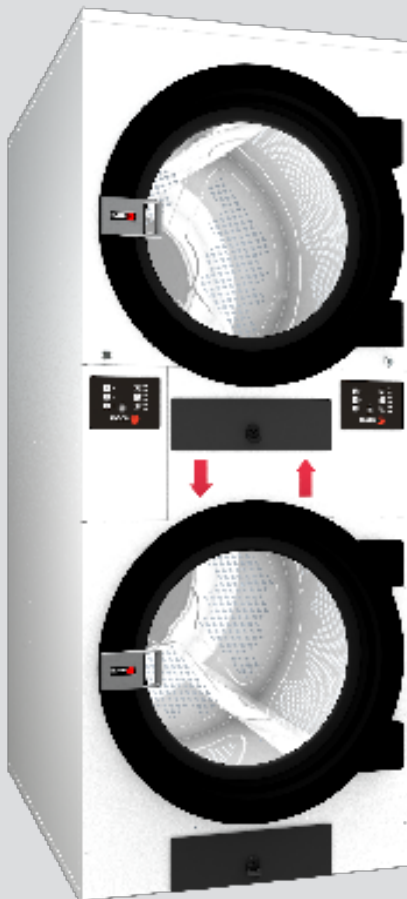

CHARACTERISTICS

M PROGRAMMER

- New M programmer: push buttons to control temperature and time.

OUTSTANDING FEATURES

- Reversing drum action as standard.
- Frequency inverter as standard.
- Galvanized drum as standard.

VERSATILITY

- Make to order - customisation.
- OPL > Multivending - Standard OPL model easily trasformable to coin laundry uses.

ERGONOMICS

- Drawer as fluff filter, made of stainless steel.
- Biggest door diameters.

MAINTENANCE

- Hinged panel: easy and ergonomic access.
- Technical menu: statistics for technicians and maintenance with external console (with console option).


OTHERS

- COOL DOWN - anti-wrinkle at the end of the cycle.
- Heating options: electric, gas and steam.
- CE approved.

OPTIONS

- Screen in M programmer (2 units).
- Fluff filter with grid 0,3 mm (standard in STACK is 0,6 mm).
- Ship voltage for electric models: 440V III 50/60 Hz No neutral
- Other voltages available

TECHNICAL DATA	UNIT.	SC-2-22 M
CAPACITY		
Capacity 1/18	Kg	48
Capacity 1/20	Kg	44
Hourly Output (gas)	Kg/h	88
Evaporation capacity (gas)	l/h	44
DRUM		
Ø Drum	mm	835
Ø Door	mm	574
Door center height	mm	547/1.618
Load hole bottom height	mm	272/1.322
Drum length	mm	800
Drum volume	l	438
POWER		
Drum motor power	Kw	0,37x2
Fan motor power	Kw	0,55x2
Electric heating power	Kw	-
Total electric power (elec.model)	Kw	-
Gas heating power	Kw	30,4x2
Instant propane gas consumption (G31)	Kg/h	1,03 x 2
Instant natural gas consumption (G20)	m3/h	1,27 x 2
Total electric power (gas model)	Kw	1,94
CONNECTIONS		GAS
Tension 230V - I + N + T	Nº x mm2 / A	3 x 1,5 / 20A
Tension 230V - III + T	Nº x mm2 / A	-
Tension 400V - III + N + T	Nº x mm2 / A	-
Ø Gas inlet	BSP	3/4"
DIMENSIONS / PACKING DIMENSIONS		
Net width / Gross width	mm	870 / 950
Net Depth / Gross Depth	mm	1.328 / 1.411
Net Height / Gross Height	mm	2.117 / 2.250
Net weight / Gross weight	Kg	PENDIENTE
OTHERS		
Max airflow	m3/h	900x2
Ø Fume exhaust	mm	250
Sound level	dB	69

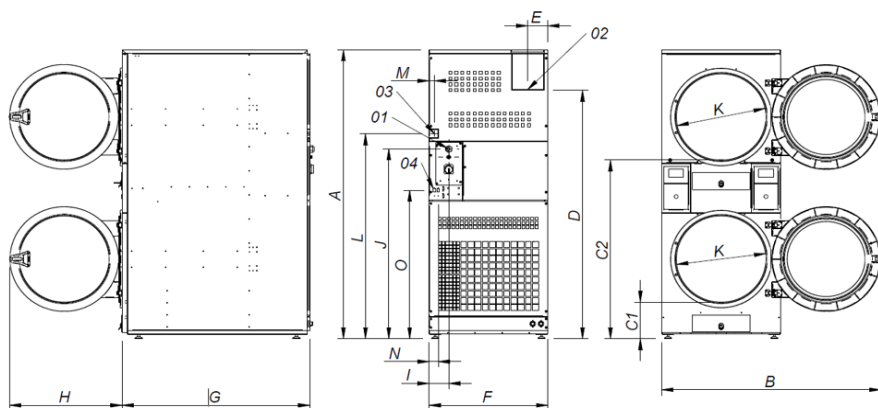

01 ELECTRIC CONNECTION
 02 FUMES OUTPUT Ø200
 03 GAS INLET 1/2"
 04 ETHERNET CONNECTION
 (ONLY TOUCH CONTROL)

	A	B	C1	C2	D	E	F	G	H	I	J	K	L	M	N	O
SC-2-22 TP2	2118	1490	286	1330	1940	149	870	1312	735	73	320	575	250	70	45	1416