



WASHING

HIGH SPIN WASHERS LOW AND MEDIUM CAPACITY LA-18/22 TP2

CHARACTERISTICS

TP2

- User friendly and totally programmable 7"
- USB Connection. Online platform free of charge for programming, telemetry, data analysis...thanks to the IoT
- Videos on display (ads, instructions, etc.)
- 37 languages
- 8 dosing signals as standard

G FACTOR

- High G-Factor: G-FACTOR 450-500

EFFICIENCY

- Intelligent consumption
- Optimal loading
- Water Recovery tanks ready: KRS
- Low water consumption

VERSATILITY

- Make to order: customisation
- OPL < > COIN
- Electric < > Hot water
- Drain valve < > Pump
- Wet cleaning features

CONNECTIVITY

- IoT - FagorKonnnect standard
- Remote technical service
- Management of laundries: OPL and COIN
- Remote payment

ERGONOMICS

- Biggest door diameters: Ø460
- Easy opening/closing system for door lock

MAINTENANCE

- Hinged control panel: easy and ergonomic access
- Technical menu: statistics for technicians and maintenance with external console (with console option)

OTHERS

- Grey skinplate outer casing
- Drum and tub in stainless steel AISI 304
- Detergent dispenser with 4 compartments
- Electronic control of imbalance with frequency control
- LOADING AID system: water and rotation control
- CB and WRAS approved product. Option ETL
- High spin washers with suspended drum


OPTIONS

- DQ-2 Dosing pump kit
- Extra dosing pump DB-1
- Double drain
- Normally closed valve
- WaterFULL FLOW recirculation of bath water
- Levelling feet
- Auto Weight: automatic weighing sensor system on feet (Includes kit with 6 extra dosing signals)
- Relay card with 6 extra dosing signals: up to 14 signals
- Silicone gasket
- Reversible door opening
- Tropicalized model: protected board
- Steam kit to transform an E or HW heated machine into steam version
- Plinth to level all machines from top
- Plinth to align the doorbase at 850mm)
- Plinth for mops with drawer inox/skinplate
- Stainless steel outer casing
- Stainless steel front panel
- Maritime voltage for electric models: 440V III 50/60 Hz No neutral
- Coin/token kit
- Auto unlock kit for the door



U.		LA-18 TP2		LA-22 TP2	
DRUM					
Load capacity 1:9 / 1:10	Kg	20/18		25/22	
Volume	l	180		220	
Diameter	mm	700		700	
Depth	mm	470		560	
GENERAL DETAILS					
Washing speed / speed	r.p.m.	47/1.133		47/1.071	
G Factor	-	500		450	
Maximum force transmitted	KN	3,41 ±1,4		4,12 ±1,4	
Frequency-dynamic force	Hz	16		16	
Noise level	dB	<70		<70	
Coin laundry version	-	Yes		Yes	
Double drain	-	Opt.		Opt.	
Weighing System / Tilting System	-	Opt./No		Opt./No	
SLUICE option	-	No		No	
DOOR					
Height center door / Height door	mm	765/450		765/450	
Diameter	mm	460		460	
POWER					
Motor	kW	2,2		2,2	
Electric heating power	kW	12		12	
Total electric power (electric model)	kW	12,75		12,75	
Total electric power (hw, steam model)	kW	2,2		2,2	
CONNECTIONS		ELECTRIC	STEAM / HOT WATER	ELECTRIC	STEAM / HOT WATER
Tension 230V - I + N + T	N° x mm2 / A	2x16+T / 63A	2x1,5+T / 16A	2x16+T / 63A	2x1,5+T / 16A
Tension 230V - III + T	N° x mm2 / A	3x6+T / 40A	-	3x6+T / 40A	-
Tension 400V - III + N + T	N° x mm2 / A	4x4+T / 32A	-	4x4+T / 32A	-
Steam inlet (Steam model)	inch	1/2"		1/2"	
Maximum steam consumption (Steam model)	Kg/h	12		12	
Water inlet	inch	3/4"		3/4"	
Water main pressure	Kgs/cm²	2-4		2-4	
Maximum water consumption	Lit/h	111,6*/147,6**		136,4*/180,4**	
Drain	inch	3"		3"	
Drainage capacity	Lit/min	200		200	
DIMENSIONS / PACKING DIMENSIONS					
Net Width / Gross Width	mm	884 /945		884/945	
Net Depth / Gross Depth	mm	913/1.030		1.003/1.140	
Net Height / Gross Height	mm	1.415 / 1.700		1.415/1.700	
Net weight / Gross weight	kg	360/393		380/413	
Volume	m3	1,65		1,83	

*ECO program / ** Energetic 60°C

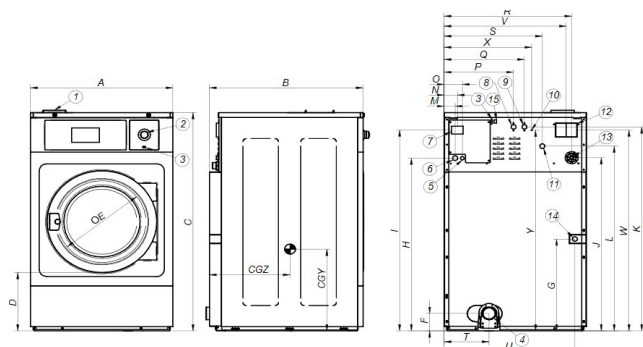

- 1- SOAP DISPENSER
- 2- EMERGENCY STOP
- 3- USB PORT
- 4- DRAIN
- 5- ELECTRIC CONNECTION TO LIQUID SOAP PUMPS
- 6- ELECTRICAL CONNECTION
- 7- MAIN SWITCH
- 8- AUXILIAR WATER INLET

- 9- HOT WATER INLET
- 10- EQUIPOTENTIAL CONNECTION
- 11- COLD WATER INLET
- 12- BLUR OUTPUT / WATER OVER-LOAD
- 13- LIQUID SOAP CONNECTION
- 14- STEAM CONNECTION
- 15- ETHERNET PORT

		A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ
LA-18	mm	884	913	1.415	450	460	95	380	1.135	1.303	1.138	1.322	1.207	61	74	101	429	509	802	640	348	814	772	1.303	569	1.297	464	702
LA-22	mm	884	1003	1.415	450	460	95	380	1.135	1.303	1.138	1.322	1.207	61	74	101	429	509	802	640	348	814	772	1.303	569	1.297	464	747