



WASHING

HIGH SPIN WASHERS LOW AND MEDIUM CAPACITY LA-28 TP2

CHARACTERISTICS

TP2

- User friendly and totally programmable 7" TP2 touch screen
- USB Connection. Online platform free of charge for programming, telemetry, data analysis... Thanks to the IoT
- Videos on display (ads, instructions, etc.)
- 37 languages
- 8 dosing signals as standard

G FACTOR

- High G-Factor: G-FACTOR 450

EFFICIENCY

- Intelligent consumption
- Optimal loading
- Water Recovery tanks ready: KRS
- Low water consumption

VERSATILITY

- Make to order: customisation
- OPL < > COIN
- Electric < > Hot water
- Drain valve < > Pump
- Wet cleaning features

CONNECTIVITY

- IoT - FagorKonnnect standard
- Remote technical service
- Management of laundries: OPL and COIN
- Remote payment

ERGONOMICS

- Biggest door diameters: Ø460
- Easy opening/closing system for door lock

MAINTENANCE

- Hinged control panel: easy and ergonomic access
- Technical menu: statistics for technicians and maintenance with external console (with console option)

OTHERS

- Grey skinplate outer casing
- Drum and tub in stainless steel AISI 304
- Detergent dispenser with 4 compartments
- Electronic control of imbalance with frequency control
- LOADING AID system: water and rotation control
- CB and WRAS approved product. Option ETL
- High spin washers with suspended drum


OPTIONS

- DQ-2 Dosing pump kit
- Extra dosing pump DB-1
- Double drain
- Normally closed valve
- WaterFULL FLOW recirculation of bath water
- Levelling feet
- Auto Weight: automatic weighing sensor system on feet (Includes kit with 6 extra dosing signals)
- Relay card with 6 extra dosing signals: up to 14 signals
- Silicone gasket
- Reversible door opening
- Tropicalized model: protected board
- Steam kit to transform an E or HW heated machine into steam version
- Plinth to level all machines from top
- Plinth to align the doorbase at 850mm)
- Plinth for mops with drawer inox/skinplate
- Stainless steel outer casing
- Stainless steel front panel
- Maritime voltage for electric models: 440V III 50/60 Hz No neutral
- Coin/token kit
- Auto unlock kit for the door



U.		LA-28 TP2	
DRUM			
Load capacity 1:9 / 1:10	Kg	31/28	
Volume	l	280	
Diameter	mm	770	
Depth	mm	585	
GENERAL DETAILS			
Washing speed / Spining speed	r.p.m.	45/1.024	
G Factor	-	450	
Maximum force transmitted	KN	5,59 ± 1,75	
Frequency-dynamic force	Hz	15	
Noise level	dB	<70	
Coin laundry version	-	Sí	
Double drain	-	Opt.	
Weighing System / Tilting System	-	Opt./No	
SLUICE option	-	No	
DOOR			
Height center door / Height door	mm	865/560	
Diameter	mm	460	
POWER			
Motor	kW	4	
Electric heating power	kW	18	
Total electric power (electric model)	kW	19,2	
Total electric power (hw, steam model)	kW	4	
CONNECTIONS		ELECTRIC	STEAM / HOT WATER
Tension 230V - I + N + T	Nº x mm2 / A	-	2x4+T / 32A
Tension 230V - III + T	Nº x mm2 / A	3x16+T / 63A	-
Tension 400V - III + N + T	Nº x mm2 / A	4x4+T / 32A	-
Steam inlet (Steam model)		3/4"	
Maximum steam consumption (Steam model)	Kg/h	12	
Water inlet		3/4"	
Water main pressure	Kgs/cm²	2-4	
Maximum water consumption	Lit/h	173,6*/229,6**	
Drain		3"	
Drainage capacity	Lit/min	200	
DIMENSIONS / PACKING DIMENSIONS			
Net Width / Gross Width	mm	979/1.040	
Net Depth / Gross Depth	mm	1.070/1.210	
Net Height / Gross Height	mm	1.553/1.850	
Net weight / Gross weight	kg	540/595	
Volume	m3	2,33	

*ECO program / ** Energetic 60°C

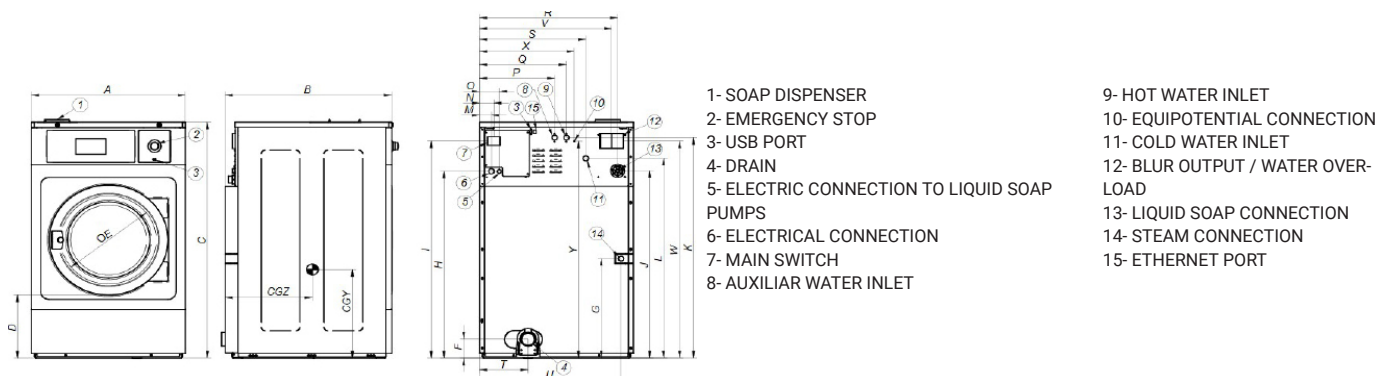

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ
LA-28	979	1099	1553	560	460	133	490	1282	1450	1259	1465	1354	61	74	101	481	561	861	673	367	909	831	1424	624	1510	773	735