



WASHING

HIGH SPIN WASHERS HIGH CAPACITY LA-60C/80C TP2

CHARACTERISTICS

TP2

- User friendly and totally programmable 7".
- USB Connection. PC software free of charge for programming, traceability, data analysis.
- Videos on display (ads, instructions)
- 37 languages.
- 8 dosing signals as standard.

G FACTOR

- High G-Factor 450.

EFFICIENCY

- Intelligent consumption.
- Optimal loading.
- Low water consumption.

VERSATILITY

- Electric < > Hot water.
- WET CLEANING features as standard.

CONNECTIVITY

- IoT - FagorKonnnect standard
- Remote technical service.
- Managemant of laundries: OPL.

ERGONOMICS

- Big door diameters: Ø 560 mm.
- Easy opening/closing system for door lock.

MAINTENANCE

- Equivalent parts for all models: contactors, electronic devices, gear.
- Technical menu: traceability, error diagnosis.

OTHERS

- Drum and tub in stainless steel AISI 304
- 3 water inlets
- Soft mounted, free standing washers.
- Panels in skinplate
- Easy to install, no need of fixation to the floor.
- CB and WRAS approved product. Option ETL
- High spin washers with suspended drum.


OPTIONS

- DQ-2 Dosing pump kit
- Extra dosing pump DB-1
- Double drain
- Tropicalized model: protected board
- Tilting options: frontal or double tilt
- Auto Weight: automatic weighing sensor system on feet (Not available with tilting kits)
- Relay card with 6 extra dosing signals: up to 14 signals
- Stainless steel AISI 304 outer casing
- Double heating E+S
- Maritime voltage for electric models: 440V III 50/60 Hz No neutral



U.		LA-60C TP2		LA-80C TP2	
DRUM					
Load capacity 1:9 / 1:10	Kg	65 / 59		85 / 77	
Volume	l	590		770	
Diameter	mm	1.048		1.048	
Depth	mm	680		892	
GENERAL DETAILS					
Washing speed / Spining speed	r.p.m.	38 / 875		38 / 875	
G Factor	-	450		450	
Maximum force transmitted	KN	18 ±4,2		23 ±4,8	
Frequency-dynamic force	Hz	12,66		12,66	
Noise level	dB	< 70		< 70	
Coin laundry version	-	No		No	
Double drain	-	Opt		Opt	
Weighing system / Tilting system	-	Opt		Opt	
SLUICE option		No		No	
DOOR					
Height door center / door base	mm	1.170 / 810		1.170 / 810	
Diameter	mm	560		560	
POWER					
Motor	kW	15		15	
Electric heating power	kW	36*/24**		48*/36**	
Total electric power (electric model)	kW	39*/27**		51*/39**	
Total electric power (hot water, steam)	kW	15		15	
CONNECTIONS		ELECTRIC	STEAM/HOT WATER	ELECTRIC	STEAM/HOT WATER
Tension 230V - III + T	N° x mm2 / A	3x25+T / 100A	3x10+T / 50A	3x25+T / 100A	3x10+T / 50A
Tension 400V - III + N + T	N° x mm2 / A	4x16+T / 63A	4x10+T / 50A	4x25+T / 80A	4x10+T / 50A
Steam inlet (Steam model)	Inch	3/4"		3/4"	
Max. steam consumption (Steam model)	Kg/h	21		25	
Water inlet	Inch	1"		1"	
Water main pressure	Kgs/cm2	2-4		2-4	
Maximum water consumption	Lit/h	365,8*/483,8**		477,4*/631,4**	
Drain	Inch	3"		3"	
Drainage capacity	Lit/min	200		200	
DIMENSIONS / PACKING DIMENSIONS					
Net Width / Gross Width	mm	1.420 / 1.600		1.420 / 1.600	
Net Depth / Gross Depth	mm	1.433 / 1.595		1.645 / 1.805	
Net Height / Gross Height	mm	1.880 / 1.930		1.880 / 1.930	
Net weight / Gross weight	kg	1.650 / 1.800		1.800 / 2.000	
Volume	m3	4,9		5,6	

*Electric heating / **Double heating electric+steam
*ECO program / ** Energetic 60°C

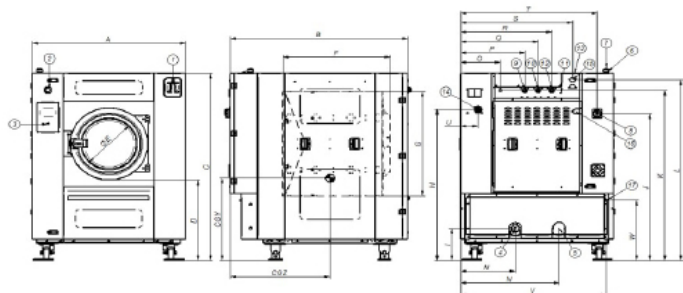

- 1- SOAP DISPENSER
- 2- EMERGENCY STOP
- 3- USB PORT
- 4- DRAIN 1
- 5- DRAIN2
- 6- ELECTRIC CONNECTION TO LIQUID SOAP PUMPS
- 7- ELECTRICAL CONNECTION
- 8- MAIN SWITCH
- 9- AUXILIAR WATER INLET

- 10- HOT WATER INLET
- 11- EQUIPOTENTIAL CONNECTION
- 12- COLD WATER INLET
- 13- STEAM OUTPUT
- 14- LIQUID SOAP CONNECTION
- 15- STEAM CONNECTION
- 16- AIR INTAKE
- 17- ETHERNET PORT

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	CGY	CGZ
LA-60C	1.420	1.433	1.880	810	560	760	1.050	1.563	323	1.475	1.710	1.817	508	912	367	595	720	845	1.040	1.267	160	1.353	608	830	820
LA-80C	1.420	1.645	1.880	810	560	972	1.050	1.563	323	1.475	1.710	1.817	508	912	367	595	720	720	1.040	1.267	160	1.353	608	830	925