



WASHING

NORMAL SPIN WASHERS LOW AND MEDIUM CAPACITY LN-11/14 TP2



CHARACTERISTICS

TP2

- User friendly and totally programmable 7"
- USB Connection. Online platform free of charge for programming, telemetry, data analysis...thanks to the IoT.
- Videos on display (ads, instructions, etc.)
- 37 languages
- 8 dosing signals as standard 8 dosing

G FACTOR

- High G-Factor of 200

EFFICIENCY

- Intelligent consumption
- Optimal loading
- Low water consumption

VERSATILITY

- Make to order: customisation
- OPL < > COIN
- Electric < > Hot water
- Wet cleaning features

CONNECTIVITY

- IoT - FagorKonnnect
- Remote technical service
- Management of laundries: OPL and selfservice
- Remote payment

ERGONOMICS

- Biggest door diameters: Ø373
- Easy opening/closing system for door lock

MAINTENANCE

- Hinged control panel: easy and ergonomic access.
- Equivalent parts for all models: contactors, electronic devices,...
- Technical menu: telemetry, error diagnosis.

OTHERS


- Hard mounted washers.
- Anchoring to floor with anchoring base.
- Panels in skinplate.
- Drum and tub in stainless steel AISI 304
- 3 water inlets.
- CB and WRAS approved product
- Option ETL

OPTIONS

- DQ-2 Dosing pump kit
- Extra dosing pump DB-1
- SLUICE: model with 8mm drum holes
- Anchoring base
- External double drain 3"
- Normally closed valve
- Water FULL FLOW: recirculation of bath water
- Relay card with 6 extra dosing signals: up to 14 signals
- Silicone gasket
- Reversible door opening
- Tropicalized model: protected board
- Steam kit to transform an E or HW heated machine into steam version
- Stainless steel AISI 304 outer casing
- Stainless steel AISI 304 front panel
- Maritime voltage for electric models: 440V III 50/60 Hz No neutral
- Coin / token kit
- Auto unlock kit for the door.

U.		LN-11 TP2		LN-14 TP2	
DRUM					
Load capacity 1:9 / 1:10	Kg	11/10		14/13	
Volume	l	100		130	
Diameter	mm	620		620	
Depth	mm	330		430	
GENERAL DETAILS					
Washing speed/ Spinning speed	r.p.m.	53/759		53/759	
Factor G	-	200		200	
Maximum force transmitted	KN	2,0 ±3		2,31 ±4	
Frequency-dynamic force	Hz	8,93		8,93	
Noise level	dB	<70		<70	
Coin laundry version	-	Yes		Yes	
Double drain	-	No		Opt	
Weighing system / Tilting system	-	No/No		No/No	
SLUICE option	-	Yes		Yes	
DOOR					
Height center door/ Height door	mm	570/310		570/310	
Diameter	mm	373		373	
POWER					
Motor	kW	1,1		1,1	
Electric heating power	kW	6		9	
Total electric power (electric model)	kW	6,25		9,5	
Total electric power (hw, steammodel)	kW	1,1		1,1	
CONNECTIONS		ELECTRICAL	STEAM / HOT WATER	ELECTRICAL	STEAM / HOT WATER
Tensión 230V- I + N + T	Nº x mm2 / A	2x6+T / 40A	2x1,5+T / 16A	2x10+T / 50A	2x1,5+T / 16A
Tensión 230V- III + T	Nº x mm2 / A	3x2,5+T / 20A	-	3x2,5+T / 20A	-
Tensión 400V- III + N + T	Nº x mm2 / A	4x1,5+T / 16A	-	4x1,5+T / 16A	-
Steam inlet (Steam model)	inch	1/2"		1/2"	
Maximum steam consumption (Steam model)	Kg/h	7		8,5	
Water inlet	inch	3/4"		3/4"	
Water main pressure	Kgs/cm²	2-4		2-4	
Maximum water consumption	Lit/h	62*/82**		80,6*/106.6**	
Drain	inch	3"		3"	
Drainage capacity	Lit/min	200		200	
DIMENSIONS / PACKING DIMENSIONS					
Net Width / Gross Width	mm	719/800		719/800	
Net Depth / Gross Depth	mm	684/850		830/990	
Net Height / Gross Height	mm	1.158/1.350		1.158/1.350	
Net weight / Gross weight	kg	217/225		239/247	
Volume	m3	1,07		1,07	

* ECO program / **Energetic 60°C

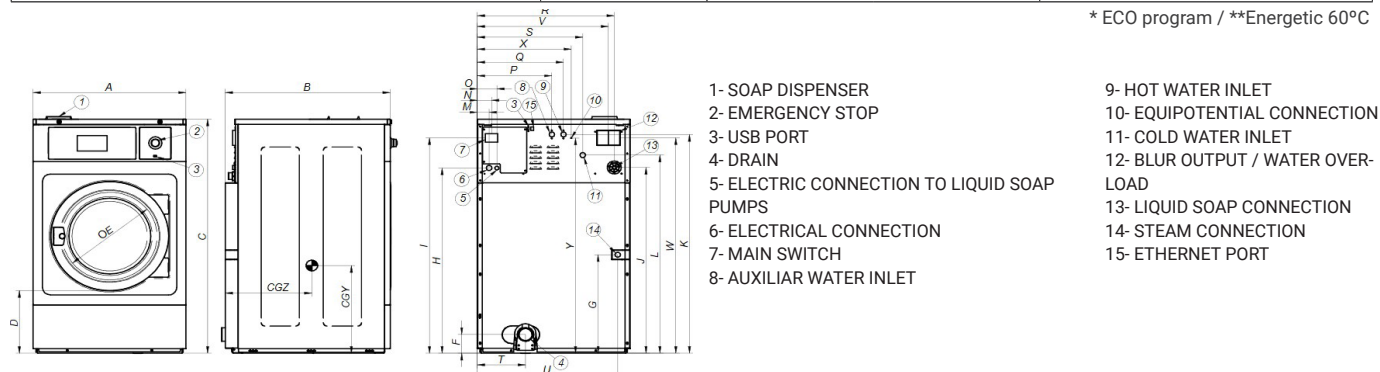

		A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ
LN-11	mm	719	697	1.158	310	373	144	440	886	1.054	889	1.073	958	61	74	101	316	376	637	475	211	654	607	1.053	416	1.053	383	511
LN-14	mm	719	840	1.158	310	373	144	440	886	1.054	889	1.073	958	61	74	101	316	376	637	475	211	654	607	1.053	416	1.053	484	524