



WASHING

NORMAL SPIN WASHERS LOW AND MEDIUM CAPACITY LN-18/22 TP2



CHARACTERISTICS

TP2

- User friendly and totally programmable 7"
- USB Connection. Online platform free of charge for programming, telemetry, data analysis...thanks to the IoT.
- Videos on display (ads, instructions, etc.)
- 37 languages.
- 8 dosing signals as standard.

G FACTOR

- G-FACTOR 200

EFFICIENCY

- Intelligent consumption
- Optimal loading
- Low water consumption

VERSATILITY

- Make to order: customisation
- OPL < > COIN
- Electric < > Hot water
- Wet cleaning features

CONNECTIVITY

- IoT - FagorKonnnect
- Remote technical service
- Managemant of laundries: OPL and COIN
- Remote payment

ERGONOMICS

- Biggest door diameters: Ø460
- Easy opening/closing system for door lock

MAINTENANCE

- Hinged panel: easy access to parts
- Equivalent parts for all models: contactors, electronic devices, gear
- Technical menu: traceability, error diagnosis

OTHERS


- Hard mounted washers.
- Anchoring to floor with anchoring base.
- Panels in skinplate.
- Drum and tub in stainless steel AISI 304
- 3 water inlets.
- CB and WRAS approved product
- Option ETL

OPTIONS

- DQ-2 Dosing pump kit
- Extra dosing pump DB-1
- SLUICE: model with 8mm drum holes
- Anchoring base
- Double drain
- Normally closed valve
- Water RE-CYCLE: recirculation of bath water
- Relay card with 6 extra dosing signals: up to 14 signals
- Silicone gasket
- Reversible door opening
- Tropicalized model: protected board
- Steam kit to transform an E or HW heated machine into steam version
- Stainless steel AISI 304 outer casing
- Stainless steel AISI 304 front panel
- Maritime voltage for electric models: 440V III 50/60 Hz No neutral
- Coin / token kit
- Auto unlock kit for the door.

U.		LN-18 TP2		LN-22 TP2	
DRUM					
Load capacity 1:9 / 1:10	Kg	20/18		25/22	
Volume	l	180		220	
Diameter	mm	700		700	
Depth	mm	470		560	
GENERAL DETAILS					
Washing speed / Spining speed	r.p.m.	50/714		50/714	
G Factor	-	200		200	
Maximum force transmitted	KN	2,63 ±5		3,04 ±5	
Frequency-dynamic force	Hz	8,42		8,42	
Noise level	dB	<70		<70	
Coin laundry version	-	Yes		Yes	
Double drain	-	Opt		Opt	
Weighing System / Tilting System	-	No		No	
Option SLUICE		Yes		Yes	
DOOR					
Height center door / Height door	mm	655/348		655/348	
Diameter	mm	460		460	
POWER					
Motor	kW	2,2		2,2	
Electric heating power	kW	12		12	
Total electric power (electric model)	kW	12,75		12,75	
Total electric power (hw, steam model)	kW	2,2		2,2	
CONNECTIONS		ELECTRIC	STEAM / HOT WATER.	ELECTRIC	STEAM / HOT WATER.
Tension 230V - I + N + T	N° x mm2 / A	2x16+T / 63A	2x4+T / 32A	2x16+T / 63A	2x4+T / 32A
Tension 230V - III + T	N° x mm2 / A	3x6+T / 40A	-	3x6+T / 40A	-
Tension 400V - III + N + T	N° x mm2 / A	4x4+T / 32A	-	4x4+T / 32A	-
Steam inlet (Steam model)	inch	1/2"		1/2"	
Maximum steam consumption (Steam model)	Kg/h	12		12	
Water inlet	inch	3/4"		3/4"	
Water main pressure	Kgs/cm²	2-4		2-4	
Maximum water consumption	Lit/h	111,6*/147,6**		136,4*/180,4**	
Drain	inch	3"		3"	
Drainage capacity	Lit/min	200		200	
DIMENSIONS / PACKING DIMENSIONS					
Net Width / Gross Width	mm	788/850		788/880	
Net Depth / Gross Depth	mm	840/1.040		950/1.140	
Net Height / Gross Height	mm	1.307/1.500		1.307/1.500	
Net weight / Gross weight	kg	281/301		300/320	
Volume	m3	1,3		1,5	

* ECO program / **Energetic 60°C

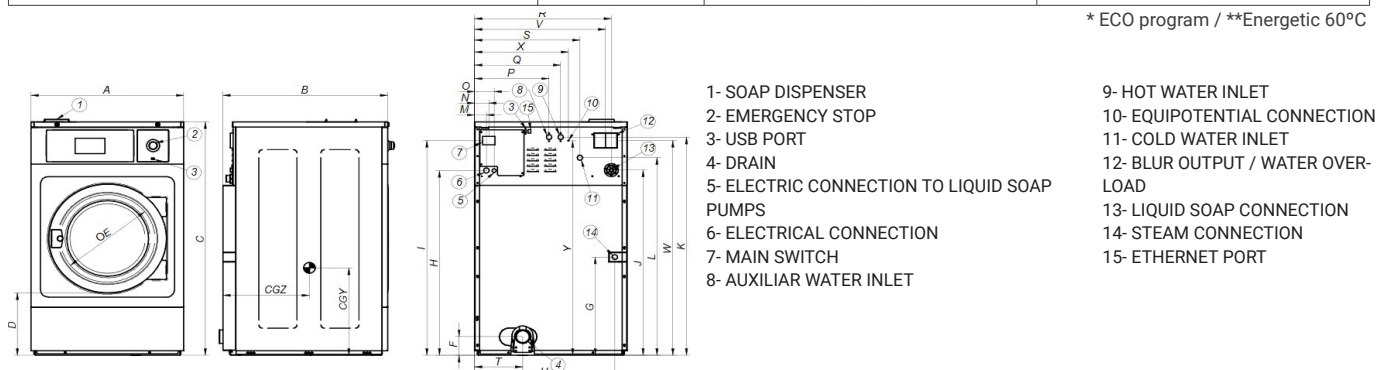

		A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ
LN-18	mm	788	850	1.307	348	450	115	552	1.035	1.203	1.038	1.222	1.107	61	74	101	385	445	706	544	249	724	676	1.202	485	1.202	479	546
LN-22	mm	788	950	1307	348	460	115	552	1035	1203	1038	1222	1107	61	74	101	385	445	706	544	249	724	676	1202	485	1202	479	586