



# WASHING

## NORMAL SPIN WASHERS LOW AND MEDIUM CAPACITY LN-35C/45C TP2



### CHARACTERISTICS

#### TP2

- User friendly and totally programmable 7" TP2 touch screen
- USB Connection. PC software free of charge for programming, traceability, data analysis...
- Videos on display (ads, instructions)
- 37 languages
- 8 dosing signals as standard

#### G FACTOR

- G-FACTOR 200

#### EFFICIENCY

- Intelligent consumption
- Optimal loading
- Water Recovery tanks ready: KRS
- Low water consumption

#### VERSATILITY

- Make to order: customisation
- OPL < > COIN
- Electric < > Hot water
- Wet cleaning features

#### CONNECTIVITY

- Remote technical service
- Management of laundries: OPL and selfservice
- Remote payment

#### ERGONOMICS

- Biggest door diameters: Ø560 (for LN-35C/45C)
- Easy opening/closing system for door lock

#### MAINTENANCE

- Hinged panel: easy access to parts
- Equivalent parts for all models: contactors, electronic devices, gear
- Technical menu: traceability, error diagnosis

#### OTHERS


- Hard mounted washers.
- Anchoring to floor with anchoring base.
- Panels in skinplate.
- Drum and tub in stainless steel AISI 304
- 3 water inlets.
- CB and WRAS approved product
- Option ETL

#### OPTIONS

- Double drain
- Normally closed valve
- Silicon gasket (for LN-35)
- WaterFULL FLOW recirculation of bath water
- Relay card with 6 extra dosing signals: up to 14 signals
- Printer
- Reversible door opening
- Tropicalized model: protected board
- Steam kit to transform an E or HW heated machine into steam version
- Stainless steel outer casing
- Stainless steel front panel
- SLUICE: model with 8mm drum holes (for LN-35C/45C)
- Anchoring base
- Maritime voltage for electric models: 440V III 50/60 Hz No neutral
- Coin / token kit
- Delayed door opening in case of power outage

| U.                                      |              | LN-35C TP2   |                   | LN-45C TP2   |                   |
|-----------------------------------------|--------------|--------------|-------------------|--------------|-------------------|
| DRUM                                    |              |              |                   |              |                   |
| Load capacity 1:9 / 1:10                | Kg           | 39/35        |                   | 49/45        |                   |
| Volume                                  | l            | 350          |                   | 450          |                   |
| Diameter                                | mm           | 860          |                   | 860          |                   |
| Depth                                   | mm           | 602          |                   | 720          |                   |
| GENERAL DETAILS                         |              |              |                   |              |                   |
| Washing speed / Spining speed           | r.p.m.       | 45/644       |                   | 45/644       |                   |
| G Factor                                | -            | 200          |                   | 200          |                   |
| Maximum force transmitted               | KN           | 4,59 ±8      |                   | 5,9 ±8       |                   |
| Frequency-dynamic force                 | Hz           | 7,58         |                   | 7,58         |                   |
| Noise level                             | dB           | <70          |                   | <70          |                   |
| Coin laundry version                    | -            | Yes          |                   | Yes          |                   |
| Double drain                            | -            | Opt          |                   | Opt          |                   |
| Weighing system / Tilting system        | -            | No/No        |                   | No/No        |                   |
| SLUICE Version                          | -            | Yes          |                   | Yes          |                   |
| DOOR                                    |              |              |                   |              |                   |
| Height center door / Height door        | mm           | 735/440      |                   | 735/440      |                   |
| Diameter                                | mm           | 560          |                   | 560          |                   |
| POWER                                   |              |              |                   |              |                   |
| Motor                                   | kW           | 4            |                   | 6            |                   |
| Electric heating power                  | kW           | 21           |                   | 21           |                   |
| Total electric power (electric model)   | kW           | 22           |                   | 22           |                   |
| Total electric power (hw, steam model)  | kW           | 4            |                   | 6            |                   |
| CONNECTIONS                             |              | ELECTRIC     | STEAM / HOT WATER | ELECTRIC     | STEAM / HOT WATER |
| Tension 230V- I + N + T                 | N° x mm2 / A | -            | 2x4+T / 32A       | -            | -                 |
| Tension 230V- III + T                   |              | 3x16+T/63A   | -                 | 3x16+T / 63A | 3x4+T / 32A       |
| Tension 400V- III + N + T               |              | 4 x6+T / 40A | -                 | 4x6+T / 40A  | 4x4+T / 32A       |
| Steam inlet (Steam model)               | inch         | 3/4"         |                   | 3/4"         |                   |
| Maximum steam consumption (Steam model) | Kg/h         | 18           |                   | 21           |                   |
| Water inlet                             | inch         | 3/4"         |                   | 3/4"         |                   |
| Water main pressure                     | Kgs/cm²      | 2-4          |                   | 2-4          |                   |
| Maximum water consump.                  | Lit/h        | 217*/287**   |                   | 279*/369**   |                   |
| Drain                                   | inch         | 3"           |                   | 3"           |                   |
| Drainage capacity                       | Lit/min      | 200          |                   | 200          |                   |
| DIMENSIONS / PACKING DIMENSIONS         |              |              |                   |              |                   |
| Net Width / Gross Width                 | mm           | 979/1.050    |                   | 979/1.050    |                   |
| Net Depth / Gross Depth                 | mm           | 1.066/1.250  |                   | 1.255/1.440  |                   |
| Net Height / Gross Height               | mm           | 1.411/1.600  |                   | 1.411/1.640  |                   |
| Net weight / Gross weight               | kg           | 473/503      |                   | 600/670      |                   |
| Volume                                  | m3           | 2,1          |                   | 2,5          |                   |

\* ECO program / \*\*Energetic 60°C

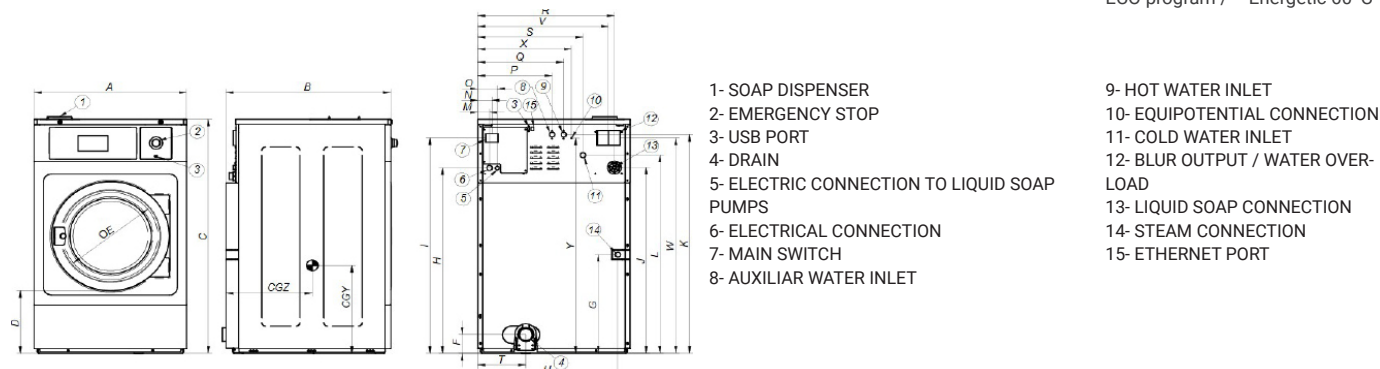

|        |    | A   | B     | C     | D   | E   | F   | G   | H     | I     | J     | K     | L     | M  | N  | O   | P   | Q   | R   | S   | T   | U   | V   | W     | X   | Y     | CGY | CGZ |
|--------|----|-----|-------|-------|-----|-----|-----|-----|-------|-------|-------|-------|-------|----|----|-----|-----|-----|-----|-----|-----|-----|-----|-------|-----|-------|-----|-----|
| LN-35C | mm | 979 | 1.065 | 1.411 | 370 | 560 | 147 | 623 | 1.139 | 1.307 | 1.116 | 1.322 | 1.211 | 61 | 74 | 101 | 545 | 625 | 885 | 715 | 262 | 917 | 855 | 1.281 | 760 | 1.373 | 635 | 682 |
| LN-45C | mm | 979 | 1.185 | 1.411 | 370 | 560 | 147 | 623 | 1.139 | 1.307 | 1.116 | 1.322 | 1.211 | 61 | 74 | 101 | 545 | 625 | 885 | 715 | 262 | 917 | 855 | 1.281 | 760 | 1.373 | 635 | 760 |